
SQB01-M1


Weighing module for 100kg...2.5t

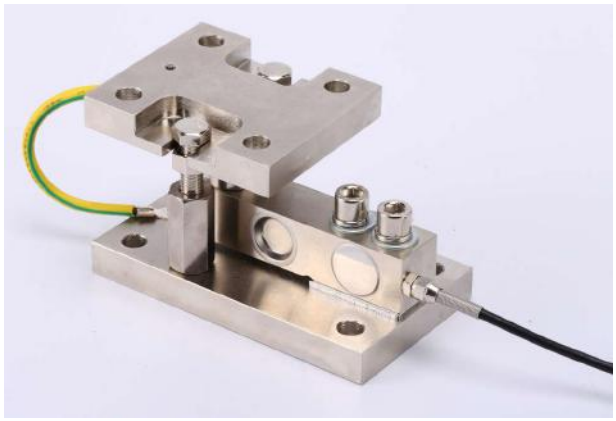



Special features特点

Equipped with load cell SSBC,class C2, C3 according to OIML R60
With overload stop and stay rod
Compact installation at minimum installation height
Easy installation
Two versions available: Galvanized or stainless steel
Self-restoring due to pendulum bearing
With anti-liftoff device and lifting device

一用于精度等级为C2, C3的SSBA传感器
一有过载保护与支撑杆
一结构紧凑
一安装简单
一电镀材料与不锈钢材料可选
一采取摆支撑有自复位功能
一带有升力与反升力装置



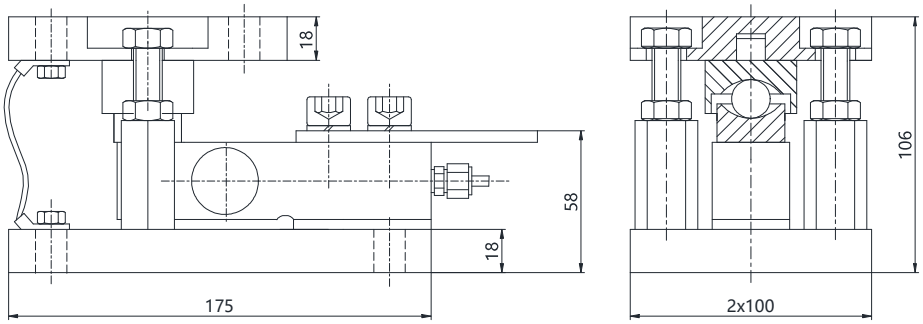

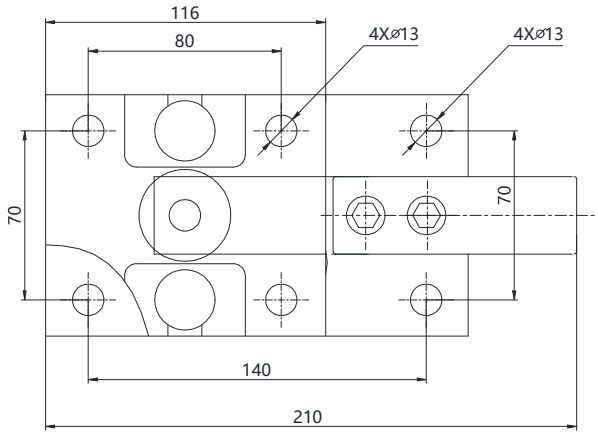

Specifications 技术说明 Exc+激励正 (Red,红);Exc-激励负(Black,黑);Sig+信号正(Green,绿);Sig-信号负(White,白)

Maximum capacity 额定载荷	**kg**	100,200,250,300	500,1000,2000,2500
Limit load 安全载荷	% of Emax	120%	
Breaking load 破坏载荷	% of Emax	200%	
Tatal error of load cells 传感器综合性能	% of Emax	±0.02,±0.03,±0.05	
Material 材料:		Galvanized or stainless steel 电镀材料或不锈钢	
Weight (incl.load cell)重量	kg	7...8	
Adjustment range of the overload stop 过载保护范围	mm	≤0.33	≤0.45
Cable 电缆: Diameter直径 ⌀5mm Length长度	m	3	